



Centinel™



CWS-DV-RM Series Workstation



KEY FEATURES

- + Intel i7 Processor
- + 4GB Video Ram
- + Monitor up to 256 Video Feeds
- + 16 Channel Synchronous Playback
- + 4U Rackmount Chassis
- + User-Friendly Video Backup/Export
- + Windows 7 Professional
- + 2 HDMI and 2 DVI Ports
- + 500W Power Supply

DIMENSIONS

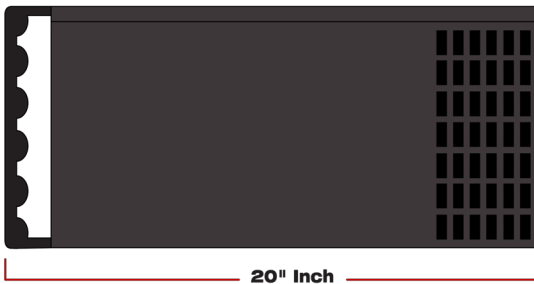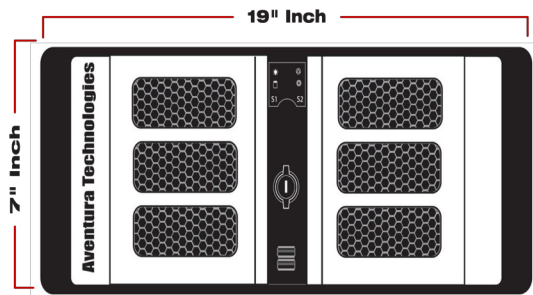

SPECIFICATIONS

Hardware

CPU	Intel i7
RAM	4 GB
Video RAM	Up to 4 GB
Storage	Up to 24 TB
OS	Windows 7 Professional
Removable Media	DVD-RW

Audio/Video

Video Display	2 HDMI / 2 DVI Out
---------------	--------------------

Communication

LAN	Redundant 10/100/1000
Input Device	106-Key USB Keyboard / Optical USB Mouse

Resolution

Video Display Resolution	Analog Up to 4CIF (NTSC: 704X480,	Digital Up to 2560 x 1600
--------------------------	--------------------------------------	------------------------------

Environment

Operating Temperature	25 ~ 110° F (-3.8 ~ 43.3° C)
-----------------------	------------------------------

Electrical

Power Supply	500 W / 90 – 264 V
--------------	--------------------

General

Weight	50 lbs (22.7 kg)
Dimensions	7"× 19"× 20" (178 × 482 × 508 mm)
Chassis	4U Rackmount, 2U Optional
Regulatory Type	CE, FCC, UL
Encrypted Watermark	AES / MDS
Safety Standards	EN60950, UL1459
EMC Standards	EN55022 Class-B, EN50082-1
FCC	Part 15 Class-B, VCCI Class-2
Warranty	2 Years

AVAILABLE MODELS

Part Number	Description
CWS-2DV-RM	Rackmount Client Workstation with 2 Digital Video Outputs and 1.5 TB Storage
CWS-4DV-RM	Rackmount Client Workstation with 4 Digital Video Outputs and 1.5 TB Storage
CWS-6DV-RM	Rackmount Client Workstation with 6 Digital Video Outputs and 1.5 TB Storage
CWS-8DV-RM	Rackmount Client Workstation with 8 Digital Video Outputs and 1.5 TB Storage

* The latest product information / specification can be found at www.guardianbodycam.com

COMPLEMENTARY PRODUCTS



PID-AIS



PID-ASZC



PID-HTX/ETX

* Data recorded on an SD memory card may be lost or damaged by data access during power-off, mechanical shock, memory card detachment, or other operations. Data loss or damage can also occur when a memory card reaches end of life, which varies according to operational conditions. No guarantee is given against damage (including passive damage).